Area Scan Cameras


A9-2528-6MP



Features

- Support up to 1/1.8" camera sensors;
- 6 models, focal length covering from 8mm to 50mm;
- High resolution for 6MP camera in full of view , high edge definition ;
- Design for close working distance, more suitable for industrial vision inspection scenarios;
- Ultra low distorion;
- Stable sharpness quality when temperature varies from -20°C~50°C;

Dimensions (mm)

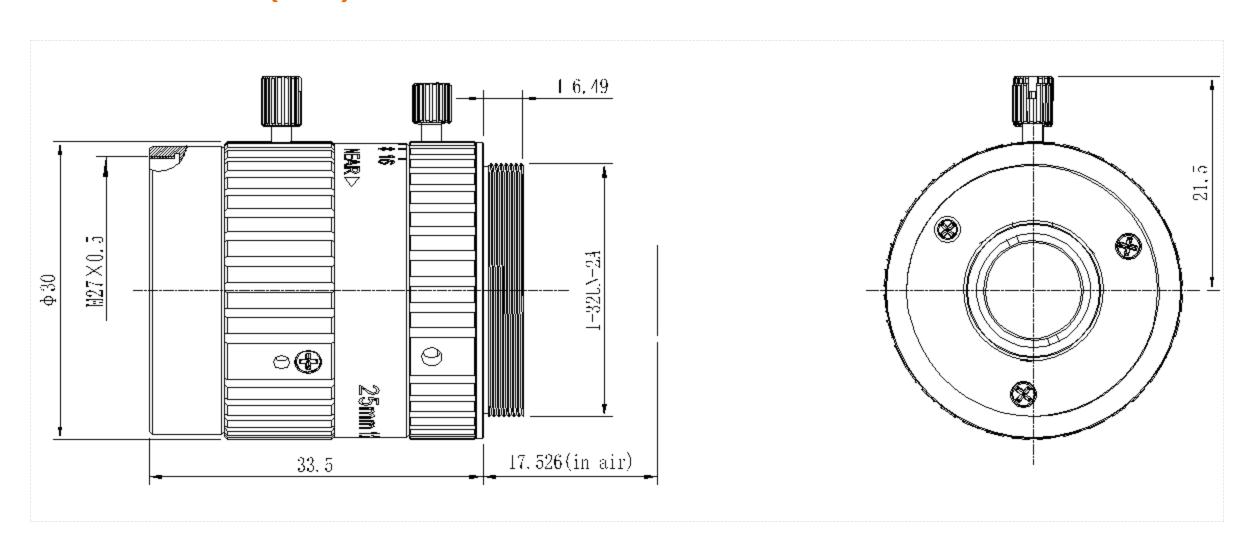



Specification

| Model | | A9-2528-6MP |
|-------------|------------------------|--|
| Basic | Series | A9-6MP Series |
| | Model | A9-2528-6MP |
| | Focal Length | 25 mm |
| | Aperture | F2.8 - 16 |
| | Image Sensor Size | Φ9.4 mm(1/1.8\'\') |
| | Focus Range | 0.15 m to infinite |
| | Optical Distortion | 0.1% |
| | TV Distortion | 0.05% |
| | Field of View | 20.98°×17.2°×11.5°(9 mm×7.4 mm×4.9 mm) |
| | Relative Illumination | 90% (F2.8); 95% (F4.0) |
| | CRA (Chief Ray Angle) | 7.8° |
| | Spectral Range | 436 nm~656 nm |
| | Spectral Transmission | T > 85% |
| Structure | Camera Mount | C - Mount |
| | Filter Thread | M27×P0.5 |
| | Focus Control | Manual |
| | Iris Control | Manual |
| | Product Dimensions | 33.5×Ф30 mm |
| | Weight | 47±5 g |
| Environment | Operating Temperature | -20°C ~ +50°C |