




# 31 MP full frame

- Support up to  $\Phi 32\text{mm}$  camera sensors ;
- Ultra-high resolution , full-frame resolution of 31 MP camera , matching  $3.45\mu\text{m}$  pixel size ;
- Ultra low distorton , TV distortion less than 0.1% ;
- Stable sharpness quality when temperature varies from  $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$  ;

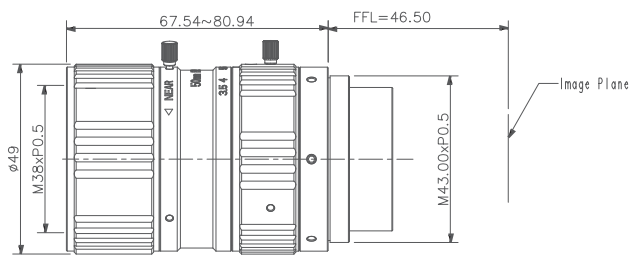

F32-5035-M43

Model		F32-5035-M43
Focal Length		50mm
Image Circle		2" ( $\Phi 32\text{mm}$ )
F#		F3.5 - F11
Angle of View	2"( $\Phi 32\text{mm}$ )	$34.5^{\circ} \times 28.4^{\circ} \times 22.1^{\circ}$
	$\Phi 28.6\text{mm}(4\text{K}-7\mu\text{m})$	$30.8^{\circ}$
FBL		46.5mm
Working Distance		0.2m to inf
TV Distortion		0.07%
Relative Illumination	F3.5	58%
	F4.0	63%
Mount		M43xP0.5
Dimensions		80.94mmx $\Phi 49\text{mm}$
Filter Thread		M38xP0.5
Weight		406g
Working Temperature		$-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$