


65 MP full frame

- Support up to $\Phi 46\text{mm}$ camera sensors ;
- Ultra-high resolution , full-frame resolution of 65 MP camera , matching $3.2\mu\text{m}$ pixel size ;
- Ultra low distortion , TV distortion less than 0.1% ;
- Stable sharpness quality when temperature varies from $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$;

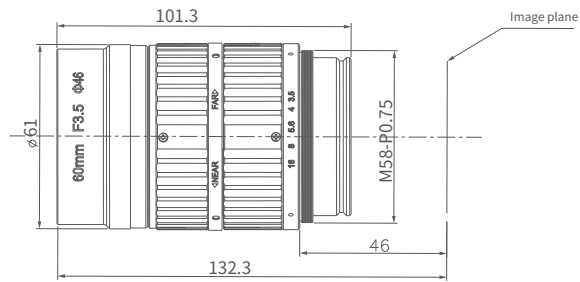

F46-6035-M58

Model		F46-6035-M58
Focal Length		60mm
Image Circle		$\Phi 46\text{mm}$
F#		F3.5 - F16
Angle of View	$\Phi 46\text{mm}$	$34.9^{\circ} \times 26.7^{\circ} \times 23.1^{\circ}$
	$\Phi 34.7\text{mm}$ (65MP)	$28.4^{\circ} \times 21.9^{\circ} \times 18.8^{\circ}$
FBL		46mm
Working Distance		0.32m to inf
TV Distortion		- 0.03%
Relative Illumination	F3.5	62%
Mount		M58xP0.75
Dimensions		101.3mmx $\Phi 61\text{mm}$
Filter Thread		No
Weight		503g
Working Temperature		$- 20^{\circ}\text{C} \sim 50^{\circ}\text{C}$